

METRIX WANDHÄNDETROCKNER

TOUCH-FREE ELECTRONIC WALL MOUNTED HAND DRYER

SPECIFICATIONS

Touch free electronic hand dryer for wall mounted installations. Powered by 110V-120/220V-240V AC. Hand dryer will automatically shut off after being used for more than 60 seconds. Sensor settings can be customized by remote control.

OPERATION


Touch free electronic hand dryer. The hand dryer is activated automatically when the user places hands under the opening and the IR sensor sends a signal to the electronic unit sending out air.

APPLICATION

High speed, high quality hand dryer with a sleek, vandal resistant design. For use in transport facilities, schools, stadiums, sports arenas and public washrooms.

ADVANTAGES

- Easy mounting back plate.
- HEPA filter for added hygienic properties.
- Full brass body.
- Matching touch free faucet and soap dispenser.
- Long lasting, durable and vandal resistant.
- Air flow intensity adjustable by external button.
- Adjustability with remote control: security time, detection range, delay out.
- On/Off function to perform cleaning.

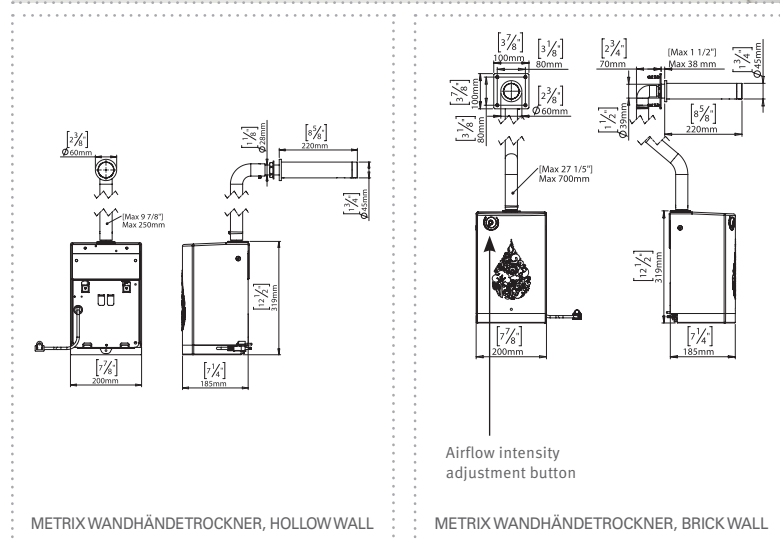

METRIX WANDHÄNDETROCKNER, HOLLOW WALL

METRIX WANDHÄNDETROCKNER, BRICK WALL

ADVANTAGES



BARRIER FREE



GERM FREE



ADJUSTABLE SETTINGS



EASY TO INSTALL

PRODUCT AT A GLANCE	
Installation	Wall mounted (hollow or brick wall), Motor
Operating Voltage	110V-120/220V-240V AC, 50/60 Hz, 0.84-1.0kW
Motor Thermal Protection	Auto resetting thermostat turns unit off, 120V at 125°C (257°F), 240V at 95°C (203°F)
Heater Thermal Protection	Auto resetting thermostat turns unit off at 85°C (185°F). Thermal fuse cuts unit at 142°C (288°F)
Standby Power	0.3-0.4W
Timing Protection	60 seconds auto shut off
Sensing Range	220 mm ± 20 mm, adjustable
Drip Proof	IP21

ORDERING INFORMATION		
MODEL	CODE	POWER
METRIX WANDHÄNDETROCKNER, HOLLOW WALL	1990202	Hollow and dry wall construction
METRIX WANDHÄNDETROCKNER, BRICK WALL	1990203	Brick and concrete wall construction

OPTIONS	
Remote control	1002599