

# METRIX THERMOSTAT, NETZBETRIEB

199 40 23

**BENKISER**  
ERFINDER SEIT 1909

## TOUCH FREE THERMOSTATIC ELECTRONIC FAUCET

### SPECIAL FEATURES


- Touch free deck mounted and thermostatic electronic faucet
- Activated by IR sensor
- Thermostatic mixer located in the faucet cap
- Filters included
- For cold and hot water
- Drastically reduces water consumption
- Helps protect against cross contamination
- Sensor settings adjustable by optional remote control
- Easy Installation
- Latching internal solenoid valve
- Standard chrome finish on solid brass body, other finishes available

### TECHNICAL DETAILS

- Operating water pressure 0.5-5.0 bar (7-72.5 PSI) with a maximum difference between hot and cold water of 2 bar, for water pressure greater than 5.0 bar use a pressure reducing valve.
- Max. water temperature 70°C (158°F)
- Water saving options 6 LPM/1.58 GPM; 4 LPM/1 GPM; 3 LPM/0.8 GPM; 1.89 LPM/ 0.5 GPM; 1.3 LPM/0.35 GPM
- Preset sensor range 170mm, adjustable with optional remote control
- Powered by 9V AC Power Adapter 100 - 240 V 50 - 60 Hz
- Preset security time 90 seconds, can be reduced with optional remote control
- Default hygiene flush every 24 hours for 30 seconds, adjustable from 12-72 hours

### MODELS AVAILABLE

- 199 40 23 - Touch free electronic and thermostatic faucet for deck mounted installations powered by 9V AC Power Adapter 100 - 240 V 50 - 60 Hz
- 199 40 00 - Touch free electronic and thermostatic faucet for deck mounted installations powered by 6 x 1.5V AA batteries

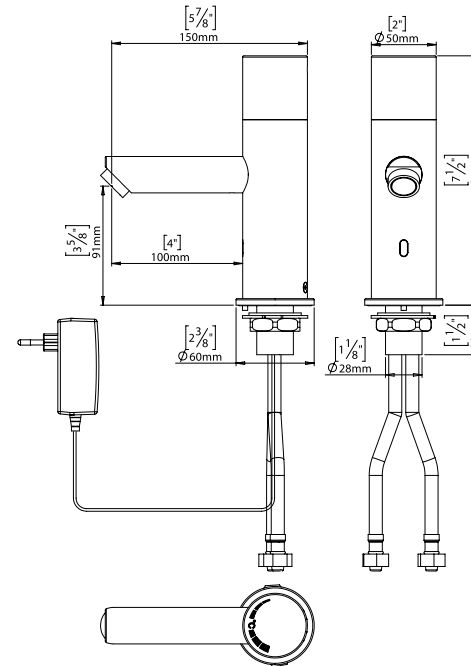

### ADVANTAGES



LEED RATING



OPTIONAL HYGIENE FLUSH



ROBUST BRASS BODY



ADJUSTABLE SETTINGS



EASY TO INSTALL



ADA DESIGNED

Daimlerstraße 2,  
D-93133 Burglengenfeld, Germany  
Tel. +49 (0) 9471 / 600 93-0  
Fax +49 (0) 9471 / 88 55  
[www.benkiser.de](http://www.benkiser.de)  
[info@benkiser.de](mailto:info@benkiser.de)