

METRIX WANDARMATUR

SPECIFICATIONS


Touch-free electronic faucet for wall-mounted installations in hollow and concrete walls. Activated by an infrared sensor. For cold or premixed water. Filters included. Powered by battery or 9V transformer. Includes a low battery indicator. Chrome plated body, other finishes available. Adjustable settings by remote control: sensor range, security time, delay in, delay out, on-off and reset to factory settings. Default hygiene flush every 24 hours for 30 seconds, adjustable from 12-72 hours.

OPERATION

The faucet will automatically activate when users place their hands in the sensor range and will stop once the users remove their hands.

APPLICATION

Ideal for easy installation in under basin furniture. Long lasting even in the harshest installation sites. Helps washrooms stay clean and saves water. Ideal for shopping malls, sport facilities and entertainment centers.

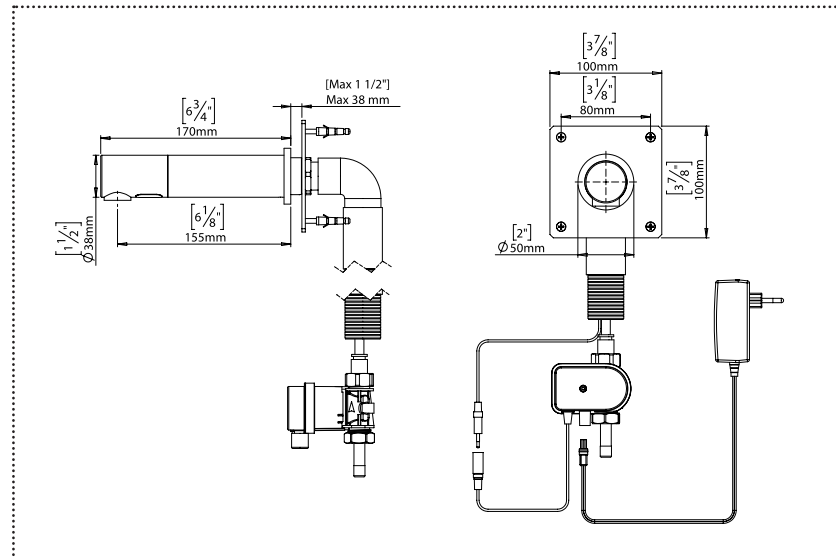

PRODUCT AT A GLANCE	
Installation	Concealed wall-mounted
Power Supply	<ul style="list-style-type: none"> • 9V Battery (not included) • 9V transformer
Operating pressure	0.5-8.0 bar / 7.0-116.0 psi
Water supply	Cold and premixed water
Water flow	6 LPM / 1.58 GPM - SSR PCA stream
Water Saving Options	4 LPM / 1 GPM ; 3 LPM / 0.8 GPM 1.89 LPM / 0.5 GPM ; 1.3 LPM 0.35 GPM - PCA spray
Water temperature	70°C Maximum
Security Time	90 seconds Adjustable by remote control

ORDERING INFORMATION			
MODEL	CODE	POWER	ADDITIONAL SPECIFICATIONS
Metrix Wandarmatur Batterie	199 20 50	Dual Power Input Box	For plaster and dry wall; and brick wall and concrete installations
Metrix Wandarmatur Netz	199 20 53	9V transformer	

ADVANTAGES



LEED RATING



OPTIONAL HYGIENE FLUSH



SOAP AND WATER



GERM FREE



ADJUSTABLE SETTINGS



EASY TO INSTALL



ADA DESIGNED