SINTRA TOUCH-FREE DECK MOUNTED FAUCET

SPECIFICATIONS

Touch-free deck-mounted electronic faucet. For cold or premixed water. Powered by IP67 dual power input box that allows the faucet to be used with 9V battery or 9V transformer. Can be powered by a 9V transformer and an integrated back up system to be used with 9V lithium battery enabling the faucet to be used normally in case of power failure. Chrome plated body, other finishes available. Activated by concealed sensor built into the spout. Filter included. Sensor includes a low battery indicator. Adjustable settings by remote control: sensor range, security time, delay in, delay out, on-off and reset to factory settings.

OPERATION

Touch-free electronic faucet. The faucet is automatically activated when users place their hands in the sensor range and stops when the users remove their hands.


APPLICATION

Combining an elegant design with vandal-resistant features. Easy installation. Long lasting even in the harshest installation sites. Helps washrooms stay clean and saves water. Prevents cross contamination, Ideal for offices, hotels and restaurants.

PRODUCT AT A GLANCE		
Installation	Deck mounted	
Power Supply Options	· IP67 Dual power input box with a 9V battery (battery not included) · IP67 Dual power input box with a 9V transformer	
Operating pressure	0.5 - 8.0 bar (7 - 116 PSI). With a pressure over 8 bar, use a pressure reducing valve.	
Water supply	Cold or premixed water	
Water Saving options	4 l/min / 1.0 gpm - Standard 1,89 l/min / 0.5 gpm - PCA Spray	
Water temperature	70°C Maximum	
SecurityTime	Auto shutoff after 90 seconds. adjustable by remote control	
Hygiene flush	Default hygiene flush every 24 hours for 30 seconds, adjustable from 12-72 hours	

ORDERING INFORMATION			
MODEL	CODE	POWER	
SINTRA, Battery	199 52 60	IP67 Dual power input box with a 9V battery (battery not included)	
SINTRA, Transformer	199 52 63	IP67 Dual power input box with a 9V transformer	



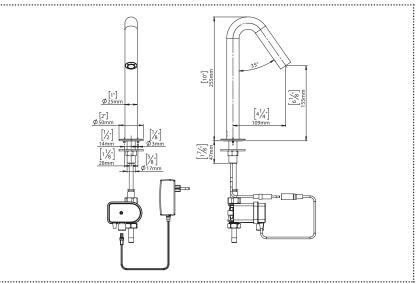



ADVANTAGES













Daimlerstraße 2, D-93133 Burglengenfeld, Germany Tel. +49 (0) 9471 / 600 93-0 Fax +49 (0) 9471 / 88 55 www.benkiser.de info@benkiser.de