

VORMISCHER II 3/8" MIT THERMOSTAT

351 50 50

BENKISER
ERFINDER SEIT 1909

SPECIFICATIONS

This high quality, lead-free, brass, pre-mixing unit is a thermostatic mixing valve that allows easy adjustment of hot and cold water and includes a hot water stop function to prevent scalding. Can be connected directly to the solenoid valve housing or to the flexible pipe. Includes built-in filters and back check valves. Also includes integrated backflow preventer and protective strainers. Connection set not included.

OPERATION

Allows technical and maintenance staff to manually set water temperature at any given time. Prevents scalding by stopping the water flow if only hot water is supplied.

APPLICATION


As hot water temperatures are set to reduce the growth of Legionella, the risk of scalding is increased. Benkiser's integrated thermostatic mixing valves allows limiting the water temperature at the point of delivery. An easy-to-use adjustment for pre-mixing hot and cold water as well as prevent the risk of scalding.

PRODUCT AT A GLANCE

Installation	Below deck
Water supply	Hot and cold water
Temperature Range	30-70°C
Pre-set Temperature	38 °C
Max. Hot Water Supply	80°C
Flow Pressure	1-5 bar
Flow Rate	25 l/min (at 3 bar)

ORDERING INFORMATION

MODEL	CODE	ADDITIONAL SPECIFICATIONS
VORMISCHER II 3/8" MIT THERMOSTAT	351 50 50	G 3/8" INLET

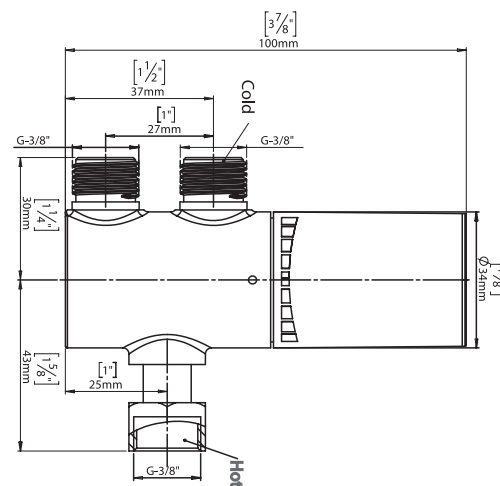

ADVANTAGES



LEED RATING



PREVENT SCALDING



EASY TO INSTALL

Daimlerstraße 2,
D-93133 Burglengenfeld, Germany
Tel. +49 (0) 9471 / 600 93-0
Fax +49 (0) 9471 / 88 55
www.benkiser.de
info@benkiser.de